

# UW200HF-D

Motor driven rewinding station for  
**OXYPHAN®** and **HEXPET®** fibre mats, diameter controlled



Front view



Control panel with touch screen display


## Technical data

Type		UW200HF-D
Design		desktop unit, solid aluminium front panel as basic carrier
Mains connection		230 V AC / 50-60 Hz / 10 A
Power consumption	<b>kVA</b>	0,2
Max. current	<b>A</b>	0,5
Control voltage	<b>V DC</b>	24
Compressed air supply	<b>bar</b>	max. 6, (oil-free, dry compressed air)
Air consumption	<b>l/min</b>	10
Nominal temperature range	<b>°C</b>	10 to 35
Operating temperature range	<b>°C</b>	10 to 35
Storage temperature range	<b>°C</b>	0 to 50
Reference temperature	<b>°C</b>	23
Diameter expansion chuck	<b>mm</b>	100
Material width	<b>mm</b>	80 to 200
Winding speed	<b>m/min</b>	5 ± 2
Tension range	<b>cN</b>	50 to 1200
Dimensions (W x D x H)	<b>mm</b>	720 x 670 x 870
Weight	<b>kg</b>	approx. 68
Protection class		IP 50

# UW200HF-D

Motor driven rewinding station for  
OXYPHAN<sup>®</sup> and HEXPET<sup>®</sup> fibre mats, diameter controlled

## Threading diagram

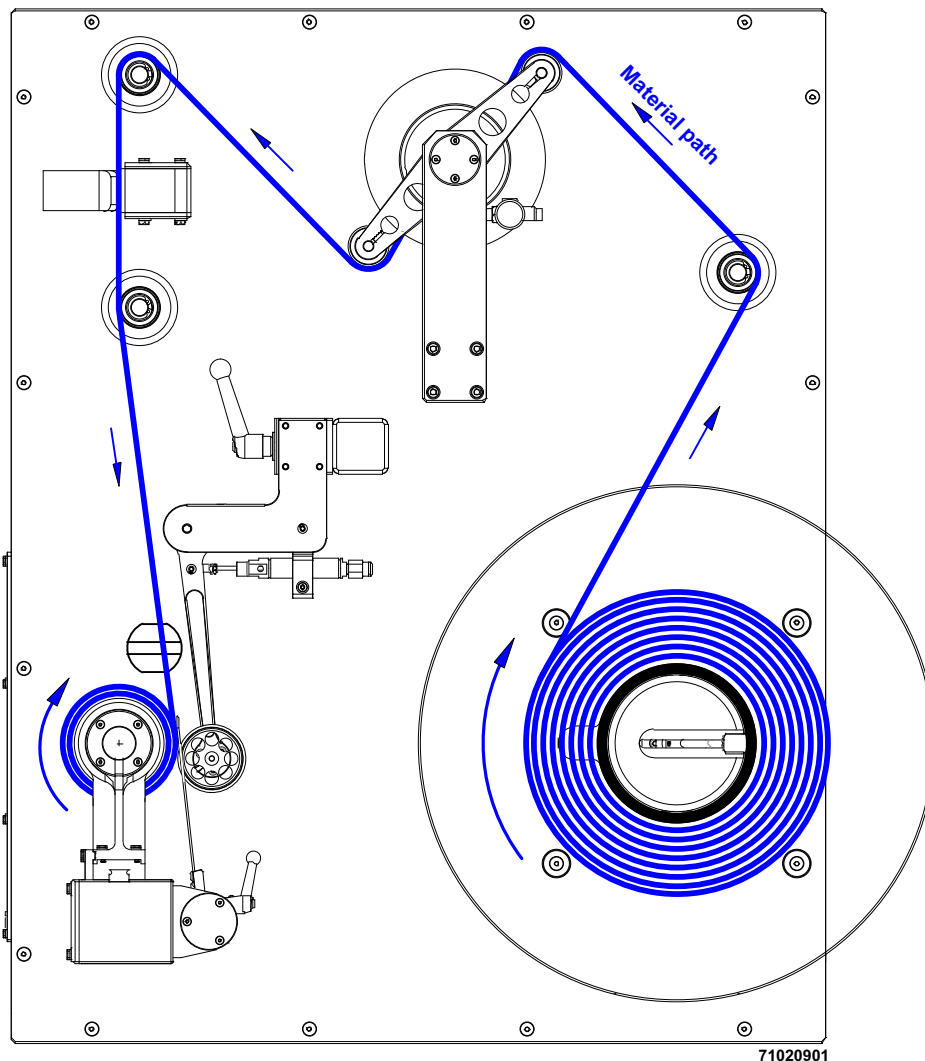

Technical design subject to change without prior notice. © 2011 by Honigmann

Honigmann Industrielle Elektronik GmbH • Krebsstraße 2-8 • D-42289 Wuppertal • ☎ +49-202-870972-0 • 📠 +49-202-870972-99