



Scale drawing

Construction size 2

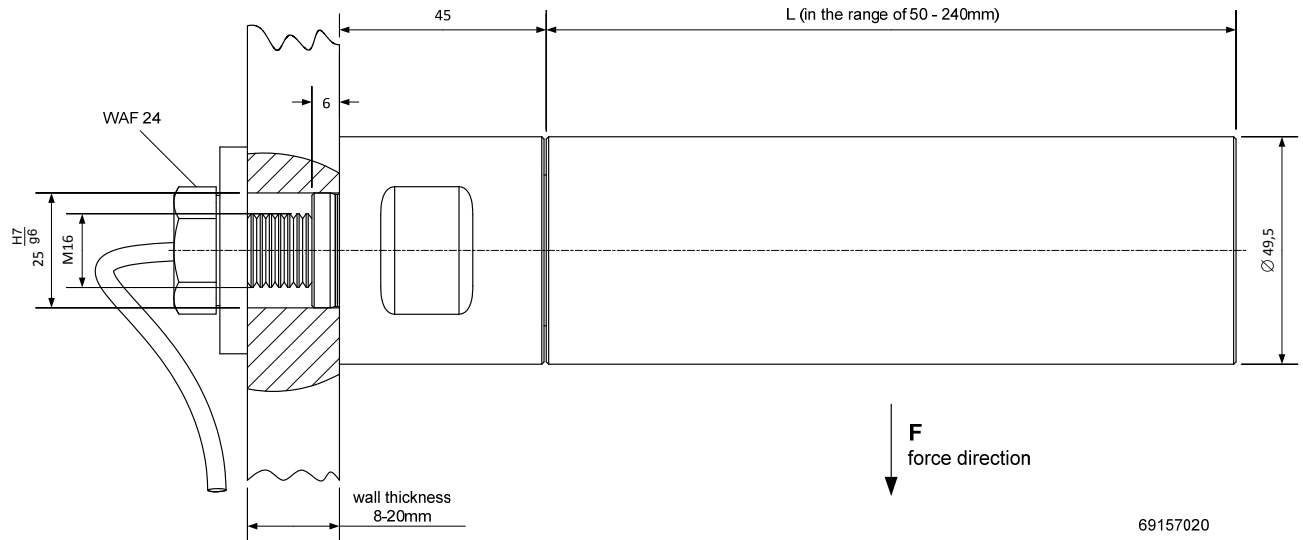

Construction size 3

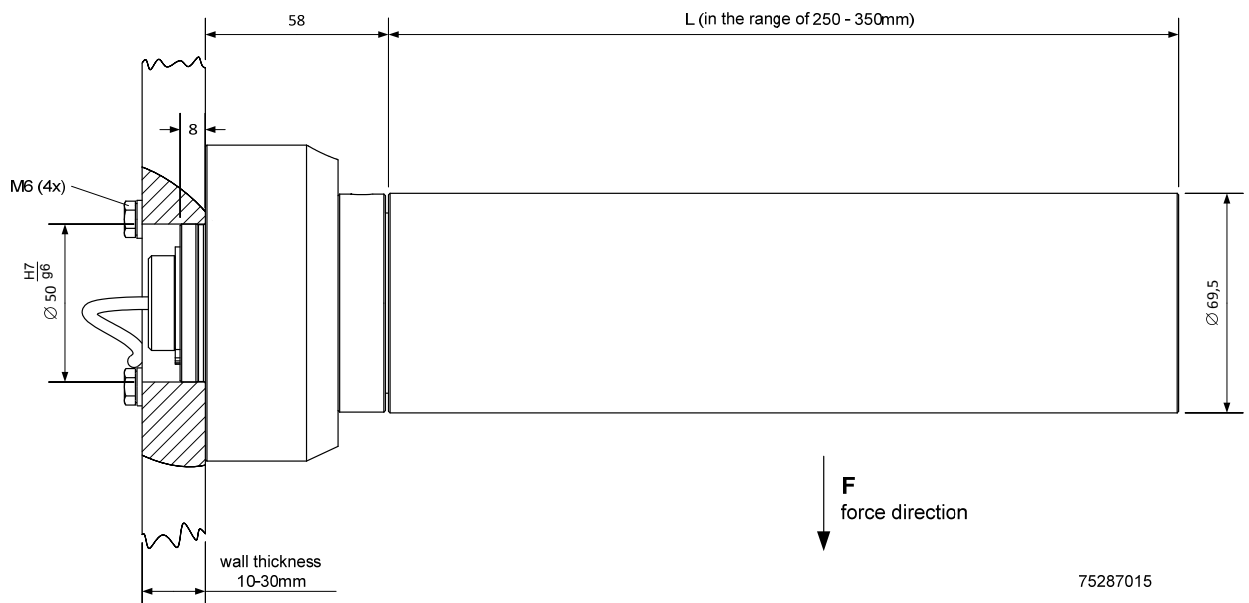

All dimensions in mm
WAF: width across flats

Rated measuring ranges

Size	Nominal force [N]							
2	100	200	300	400	500	600	1000	1200
3	100	200	300	400	500	600	1000	1200

The measuring range of the sensor begins at force's zero point.
Nominal forces differing from the list are available.

Order code

RMA-CSW 2 - 600 - 100 - 3 - O					
Sensor type					
Construction size					
Nominal force [N]					
Roll length L [mm]					
Length of cable [m]	standard: 3 option: required length				
Connection	standard: O with open ends option: S with male plug				

Scope of supply

Sensor with roll



Options

- connection cable with male plug
- length of connection cable differing from standard
- special connection cable, e.g. oil-resistant or for use in Ex-protection areas

Special designs

- nominal forces differing fom standard
- sensor housing and measuring cell made out of stainless steel, for use in humid environment
- advanced temperature range

Connections

Standard: Connection type „O“			Option: Connection type „S“				
	yellow	+ U _{Br}	Excitation		1 + U _{Br}	Excitation	
	brown	- U _{Br}			2 - U _{Br}		
	white	+ U _{Sig}	Output		3 Shield (not connected to housing)	Output	
	green	- U _{Sig}			4 + U _{Sig}		
	transp.	Shield (not connected to housing)			5 - U _{Sig}		
67164003					6 Reserved		

Technical data

Rated measuring ranges (FN)	N	0 - 100 to 0 - 1200
Rated output	mV/V	1
Rated output tolerance	%	< ±0,2
Accuracy class		0,2
Accumulated error	% F_N	< ±0,2
Excitation voltage max.	V	12
Reference excitation voltage	V	4,5
Input resistance	Ω	350 ±3
Output resistance	Ω	350 ±2
Isolation resistance	GΩ	> 5
Nominal temperature range	°C	0...50
Operational temperature range	°C	-10...70
Storage temperature range	°C	-30...90
Reference temperature	°C	23
Temperature influence per 10 K		
- on the zero point (TK0)	% F_N	< ±0,1
- on the calibration (TKC)	% F_N	< ±0,2
Creep after 30 minutes	% F_N	< ±0,1
Relative reversal error	% F_N	< ±0,2
Service load	% F_N	300
Ultimate load	% F_N	400
Breaking load	% F_N	> 500
Ultimate side load	% F_N	300
Dynamic load limit (DIN 50100)	% F_N	50
Axial torsional moment limit	Nm	35
Deflection at nominal force	mm	< 0,04
Natural frequency of the sensor	kHz	depending on roll geometry and nominal force
Weight	g	approx. 1800, depending on roll geometry
Connection cable		3 m long, flexible, shielded, 4 x 0,14 mm ² , total-Ø 4,5 mm
Surface protection		black-finished
Protection class		IP 54

Technical design subject to change without prior notice. © 2015 by Honigmann

Honigmann Industrielle Elektronik GmbH • Krebsstraße 2-8 • D-42289 Wuppertal • ☎ +49-202-870972-0 • 📠 +49-202-870972-99