


Scale drawing

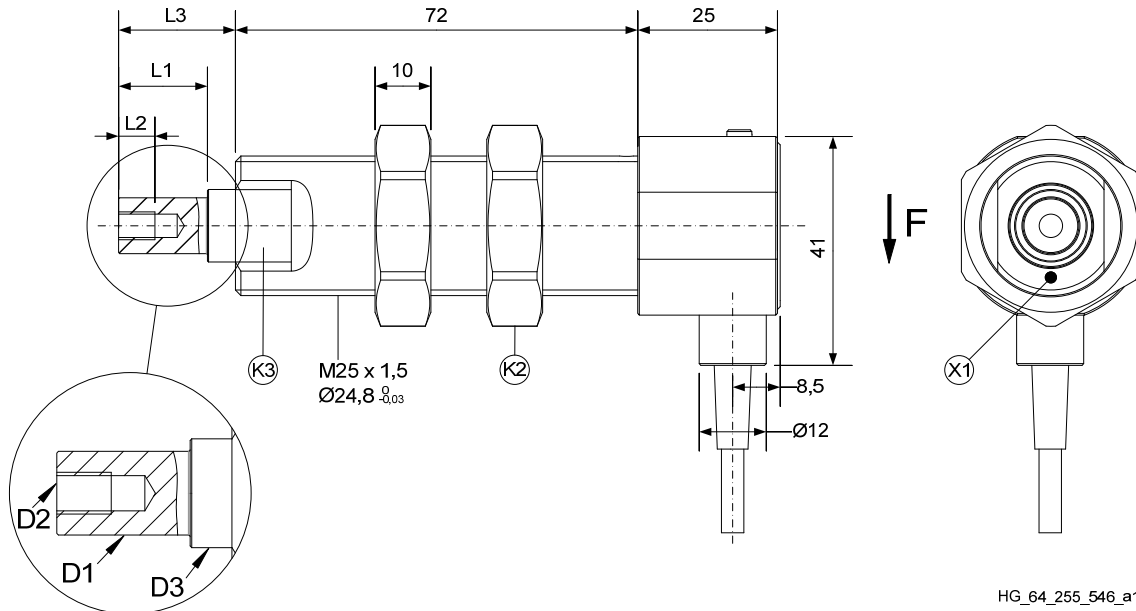

All dimensions in mm

X1: red mark indicates the position of the measuring axis

Rated measuring ranges

| Nominal force [N] | | | | | | Bearing journal Ø [mm] | | | |
|-------------------|-----|--------|---------|-----|-----|------------------------|---|----|----|
| 1* | 2* | 3* | 4* | | | 5 | 8 | 10 | |
| 5 | 10 | 20 | 30 | 40 | | 5 | 8 | 10 | |
| 50 | 60 | 100 | 200 | 300 | 400 | | 8 | 10 | 12 |
| 500 | 600 | 1000** | | | | | | 10 | 12 |
| | | | 2000*** | | | | | | 12 |

The measuring range of the sensor begins at force's zero point.

Bearing journals and nominal forces differing from the list are available.

* Special type LR (Low Range)

** Special type HR (High Range)

*** Special type XR (eXtended Range)

Dimensions

| Bearing journal Ø | | | | | | | |
|-------------------|------|----|----|----|------|--------|--------|
| D1 | L1 | D2 | L2 | D3 | L3 | K2 | K3 |
| 5 | 9,9 | M3 | 6 | 7 | 12,9 | WAF 32 | WAF 19 |
| 8 | 11,9 | M4 | 6 | 10 | 15,9 | WAF 32 | WAF 19 |
| 10 | 15,9 | M5 | 8 | 13 | 20,9 | WAF 32 | WAF 19 |
| 12 | 19,9 | M6 | 10 | 14 | 24,9 | WAF 32 | WAF 19 |

All dimensions in mm

WAF: width across flats

Non-standard bearing journal dimensions and housing execution upon request

Technical Data

| | | |
|---|------------------------|---|
| Type | | RFS® 150-E |
| Rated measuring ranges (FN) | N | 0 - 1 to 0 - 2000 |
| Accuracy class | | 0,1 |
| Supply voltage | V DC | 20 to 28 |
| Current consumption (without load) | mA | approx. 36 |
| Output | | |
| - Voltage (Standard) | V | 0 to ±10, $R_L \geq 10k\Omega$ |
| - Current 0-20mA (Option) | mA | 0 to 20, admissible load 0 to 300Ω |
| - Current 4-20mA (Option) | mA | 4 to 20, admissible load 0 to 300Ω |
| Cut-off frequency f_c (-3dB) | HZ | 70 |
| Rated temperature range | °C | 5 to 50 |
| Operational temperature range | °C | -10 to 50 |
| Storage temperature range | °C | -30 to 70 |
| Reference temperature | °C | 23 |
| Temperature influence per 10 K | | |
| - on the zero point (TK0) | % F_N | < ± 0,2 |
| - on the calibration (TKC) | % F_N | < ± 0,15 |
| Creep after 30 minutes | % F_N | < ± 0,05 |
| Linear output signal up to | % F_N | approx. 125 |
| Mech. overload protection takes effect at | % F_N | approx. 140 |
| Overload protected (#1) | % F_N | 400 to 800 (depending on nominal force) |
| Ultimate side load | % F_N | 200 |
| Deflection at nominal force | mm | 0,07 ± 20% |
| Typ. natural frequency of the sensor | kHz | 1 to 3 (depending on nominal force) |
| Weight | g | approx. 400 |
| Connection cable | | 3m long, flexible, shielded 4 x 0,14mm ² , total \varnothing 4,5 mm |
| Sensor housing and nuts | | stainless steel |
| Protection class | | IP 50 |

(#1) radial incoming force without additional bending or tilting moment

Connections

| Standard: Connection type „O“ | | Option: Connection type „S“ | |
|-------------------------------|------------------|--------------------------------------|--------------|
| | yellow | +24V DC | Power supply |
| | white | ⌊ GND | |
| | green | Signal | Output |
| | brown | ⌊ GND | |
| | transp. or black | Shield (not connected to housing) | |
| | 1 | +24V DC | Power supply |
| | 4 | ⌊ GND | |
| | 3 | Signal | Output |
| | 5 | ⌊ GND | |
| | 2 | Shield (not connected to housing) | |

Order code

| | RFS 150-E | - 50 | - 10 | - 3 | - O | -10 |
|----------------------------------|---|------|------|-----|-----|-----|
| Sensor type | | | | | | |
| Nominal force [N] | | | | | | |
| Bearing journal Ø D1 [mm] | | | | | | |
| Cable length [m] | Standard: 3m Option: required length | | | | | |
| Cable connection | Standard: O (open ends) Option: S (connector) | | | | | |
| Output signal | Standard: 10 (0-10V) Option: 0-20 (0-20mA) 4-20 (4-20mA) | | | | | |

Scope of supply

- Sensor with connection cable
- Protection cap

Accessories

The following accessories are available:

- Bearing journal adapter
- Winding protection
- Ceramic pin with holder
- Clamping flange for flange mounting

Options / Special versions

- Cylindrical sensor housing (without outside thread)
- Modified thread housing
- Custom-specific bearing journal
- Special nominal force, differing from standard
- Custom-specific orientation of terminal housing

Technical design subject to change without prior notice. © 2021 by Honigmann

Honigmann Industrielle Elektronik GmbH • In den Weiden 20 • D-58285 Gevelsberg • ☎ +49-2332-55115-0 • 📠 +49-2332-55115-99