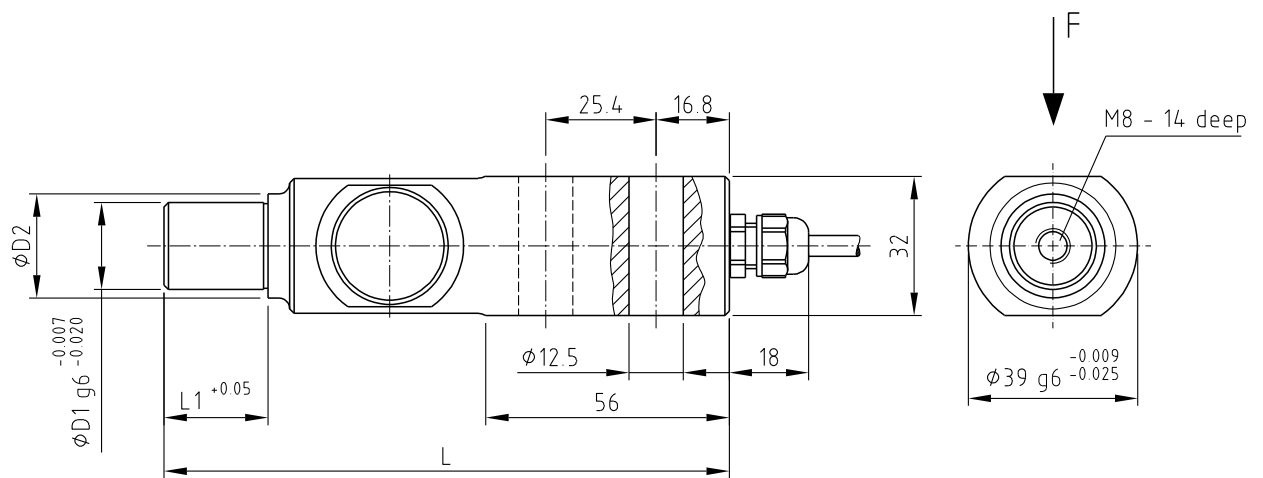


Scale drawing



67224.007

All dimensions in mm

Rated measuring ranges

Nominal force [kN]						Bearing journal Ø [mm]		
5	7,5	10	15			20	25 *	

The measuring range of the sensor begins at force's zero point.

* Preferred construction size

Dimensions and weights

Bearing journal Ø [mm]	Dimensions [mm]				Weight
D1	L1	D2	L		[g]
20	23,9	24	130		800
25	* 28,9	28	135		850

* Preferred construction size

Order code

SK 224 FM					- 10	- 20	- 3	- O
Sensor type								
Nominal force [kN]								
Bearing journal Ø [mm]								
Cable length [m]					Standard: 3			
					Option: required length			
Cable connection					Standard: O (open ends)			
					Option: S (connector)			



Scope of supply

Sensor with connection cable

Technical data

Rated measuring ranges (F_N)	kN	0 to 5 / 0 to 7,5 / 0 to 10 / 0 to 15
Rated output	mV/V	1 to 2
Rated output tolerance	%	$< \pm 0,1$
Accuracy class		0,3
Excitation voltage max.	V	12
Reference excitation voltage	V	10
Input resistance	Ω	1000 ± 4
Output resistance	Ω	1000 ± 2
Isolation resistance	GΩ	> 5
Rated temperature range	$^{\circ}\text{C}$	-10 to 50, Option: -10 to 70
Operational temperature range	$^{\circ}\text{C}$	-10 to 70
Storage temperature range	$^{\circ}\text{C}$	-30 to 80
Reference temperature	$^{\circ}\text{C}$	23
Temperature influence per 10 K		
- on the zero point (TK0)	% F_N	$< \pm 0,1$
- on the calibration (TKC)	% F_N	$< \pm 0,15$
Creep after 30 minutes	% F_N	$< \pm 0,05$
Max. load	% F_N	approx. 150
Ultimate side load	% F_N	100
Deflection at nominal force	mm	$0,07 \pm 20 \%$
Typ. natural frequency of the sensor	kHz	> 2 (depending on the nominal force)
Connection cable		3m long, flexible, shielded 4 x 0,25mm ² , total- $\varnothing$ 5,5 mm
Sensor housing		stainless steel
Protection class		IP 67

Connections

Standard: Connection type „O“		Option: Connection type „S“	
			
+ U_{Br}	Excitation	1 + U_{Br}	Excitation
- U_{Br}		2 - U_{Br}	
+ U_{Sig}	Output	3 Shield (not connected to housing)	Output
- U_{Sig}		4 + U_{Sig}	
Shield (not connected to housing)		5 - U_{Sig}	
		6 Reserved	

67164003

Technical design subject to change without prior notice. © 2017 by Honigmann

Honigmann Industrielle Elektronik GmbH • Krebsstraße 2-8 • D-42289 Wuppertal • ☎ +49-202-870972-0 • 📠 +49-202-870972-99